



Z-EACC-DAB2

DAB+ WINDOW MOUNT ANTENNA



INSTALLATION MANUAL

EN

⚠ CAUTION

- The DAB+ window mount antenna has been developed exclusively for use inside the vehicle.
- The antenna must not adversely affect the driver's field of vision.
- If your vehicle is equipped with a side airbag, the antenna must not interfere with the airbag functions in any way.
- The antenna must not be installed on movable glass surfaces such as the side windows or rear window.
- Do not bend or damage the window mount antenna.
- The ZENEC system should be installed by an authorised specialist dealer. Specific knowledge and tools are required for installation. Incorrect installation can damage the vehicle and the ZENEC system.

i NOTE

- The strength of signal reception may be impaired if you install the antenna on infrared reflective glass, thermal insulation glass, or on surfaces covered with reflective film.
- The signal strength also decreases if the antenna overlaps with another antenna, or if it is near a window heating wire.
- If you have any questions or problems with the ZENEC system, please contact the retailer where you purchased it.

SUPPLIED ITEMS

No.	Item	Quantity
1	Window Mount Antenna	1


TOOLS REQUIRED

- Plastic lever tool
- Optional: cross-head screwdriver (Phillips)
- Optional: flat-blade screwdriver
- Optional: Torx screwdriver (T20)
- Glass cleaner
- Cable ties

WORKING OUT THE INSTALLATION POSITION OF THE ANTENNA

Installing the antenna on the left-hand side

Installing the antenna on the right-hand side

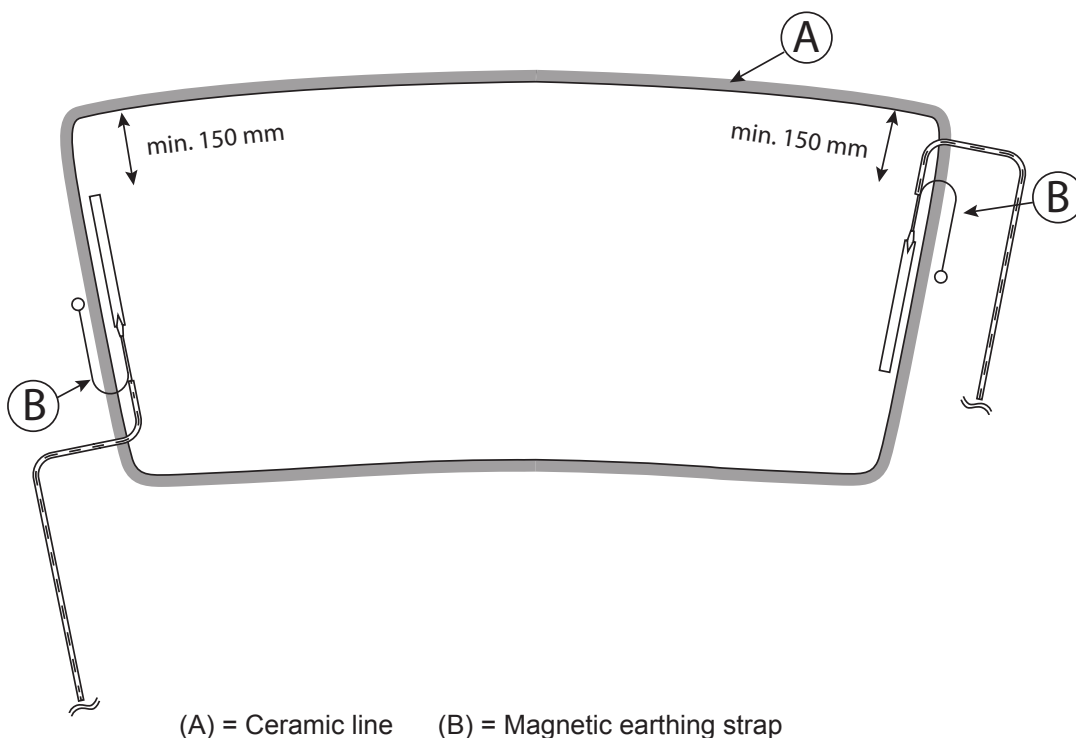

Installation:



CAUTION

- If your vehicle is fitted with a side airbag, you must leave the ignition switched off for the duration of the installation, and proceed with extreme caution.



1. Remove the A-pillar cover in your vehicle. The cover is secured with special clips. A screw is usually concealed behind a cover in the upper area of the A-pillar.

You can carefully prise the cover off with a plastic wedge or a flat-head screwdriver.



2. Clean the selected adhesive area on the windshield using the glass cleaner.

Wait until the glass surface has dried completely.



3. Remove the protective film from the window mount antenna (No. 1) and attach it so it is flush with the ceramic line.

Pay close attention to the installation position of the antenna, which is explained at the beginning of the manual.

4



4. Carefully rub the window mount antenna (No. 1) onto the windscreen to ensure that it is affixed securely.


5



5. Take the magnetic earthing strap and attach it onto the A-pillar (metal part).

Leave sufficient space for the earthing strap so you can install the A-pillar cover again later without any problems.

6

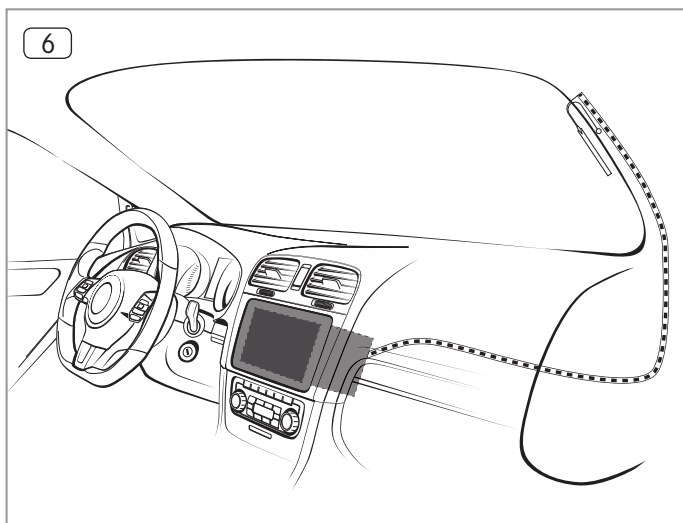

6. Route the antenna cable downwards along the A-pillar, along the dashboard and into the radio bay.



7. Use cable ties to attach the antenna cable to the existing wiring harnesses in the vehicle.

⚠ ATTENTION

- Pay particular attention to ensure that you do not adversely affect the function of the airbag in any way.



8. Reattach your vehicle's A-pillar cover in its original position.

Ensure that you do not damage the earthing strap.

9. (No picture)
Connect the DAB antenna (SMB connector) to your DAB radio.

10. (No picture)
Startup: Turn on your radio and activate the DAB+ antenna voltage (12V) in the settings.

Once connected, perform a DAB+ search on your radio.



Manufacturer: ZENEC by ACR AG · Bohrturmweg 1 · CH-5330 Bad Zurzach · Switzerland
EU Legal Representative: ACR S & V GmbH · Industriestr. 35 · D-79787 Lauchringen · Germany

Mail: support@zenec.com · www.zenec.com

Technical modifications excepted. No liability accepted for printing errors.
© Copyright 2019 · RevB / copy deadline: Q2-2019 · English